M006 TREADMILL

Functional Parameter

Rated power of motor	3.0HP（2.2KW）
Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2215×970×1768（MM）
Running surface	1450×580MM
Unit weight	291KG
Max user weight	200KG

Smart Application

21.5 touch screen

Bluetooth

WI-FI

social interconnect

Real-timedata

Immersive running

M005
TREADMILL

Commercial Treadmill

Red Grey Blue

Functional Parameter

Rated power of motor	3.0HP（2.2KW）
Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2200×910×1690（mm）
Running surface	1530×600mm
Refueling mode	automatic refueling
Mobile phone charging	wireless charging/USB port

TFT Touch Screen

Led Digital Screen

Smart Application

21.5-Inch Touch Screen | Bluetooth | WI-FI | Social Connectivity | Real-Time Data | Real-World Experience

M-9900
TREADMILL

IMPORTS

Commercial Treadmill

M-9900

Functional Parameter

Rated power of motor	3.0HP（2.2KW）
Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2350×980×1700（MM）
Running surface	1660×550MM
Unit weight	260KG
Max user weight	150KG
Refueling mode	wireless charging/USB port

TFT Touch Screen

Led Digital Screen

Smart Application

15.6-Inch Touch Screen | Bluetooth | WI-FI | Social Connectivity | Real-Time Data | Real-World Experience

DL800
TREADMILL

Commercial Treadmill

Functional Parameter

Rated power of motor	2.5HP (1.8KW)
Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2200×910×1615 (MM)
Running surface	1530×580MM
Max user weight	150KG

TFT Touch Screen

Led Digital Screen

Smart Application

23.6-Inch Touch Screen | Bluetooth | WI-FI | Social Connectivity | Real-Time Data | Real-World Experience

XMT700I

Commercial Treadmill

IMPORTS

XMT700

Functional Parameter

Model Number	XMT700I	XMT700
Indicator	21.5-Inch Display Screen	
Speed Range	1-20KM/H	1-18KM/H
Incline Range	0-20%	0-18%
Unit Dimensions	2170×970×1610 (mm)	
Running Surface	1575×600 (mm)	
Treadmill Belt	3.2T	2.2T

XMT600I

Commercial Treadmill

IMPORTS

XMT600

Functional Parameter

Model Number	XMT600I	XMT600
Indicator	23.6-Inch Display Screen	
Speed Range	1-20KM/H	1-18KM/H
Incline Range	0-20%	0-18%
Unit Dimensions	2170×970×1625 (mm)	
Running Surface	1575×600 (mm)	
Treadmill Belt	3.2T	2.2T

XMT500C-T

Mirror Screen treadmill

IMPORTS

XMT500C-T

Functional Parameter

Model Number	XMT500C-T
Indicator	21.5-Inch Rotating Screen Mirroring
Speed Range	1-18KM/H
Incline Range	0-18%
Unit Dimensions	Landscape screen 2170×970×1740(mm) Portrait screen2170×970×1845(mm)
Running Surface	1575×600 (mm)
Treadmill Belt	2.2T

XMT500CI

Commercial Treadmill

IMPORTS

XMT500C

Functional Parameter

Model Number	XMT500CI	XMT500C
Indicator	18.5-Inch Display Screen	
Speed Range	1-20KM/H	1-18KM/H
Incline Range	0-20%	0-18%
Unit Dimensions	2170×970×1610 (mm)	
Running Surface	1575×600 (mm)	
Treadmill Belt	3.2T	2.2T

XS600I

Commercial Treadmill

IMPORTS

XS600

Functional Parameter

Model Number	XS600I	XS600
Indicator	21.5-Inch Display Screen	
Speed Range	1-20KM/H	1-18KM/H
Incline Range	0-20%	0-18%
Unit Dimensions	2170×970×1720 (mm)	
Running Surface	1575×600 (mm)	
Treadmill Belt	3.2T	2.2T

XMT05I-T

Mirror Screen treadmill

IMPORTS

XMT05-T

Functional Parameter

Model Number	XMT05I-T	XMT05-T
Indicator	21.5-Inch Rotating Screen Mirroring	
Speed Range	1-20KM/H	1-18KM/H
Incline Range	0-20%	0-18%
Unit Dimensions	Landscape screen 2170×970×1615(mm) Portrait screen2170×970×1720(mm)	
Running Surface	1575×600 (mm)	
Treadmill Belt	3.2T	2.2T

XU05I

Commercial Treadmill

IMPORTS

XU05

Functional Parameter

Model Number	XU05I	XU05
Indicator	21.5-Inch Display Screen	
Speed Range	1-20KM/H	1-18KM/H
Incline Range	0-20%	0-18%
Unit Dimensions	2170×970×1670 (mm)	
Running Surface	1575×600 (mm)	
Treadmill Belt	3.2T	2.2T

XU05I

Commercial Treadmill

IMPORTS

XU05

Functional Parameter

Model Number	XU05I	XU05
Indicator	21.5-Inch Display Screen	
Speed Range	1-20KM/H	1-18KM/H
Incline Range	0-20%	0-18%
Unit Dimensions	2170×970×1670 (mm)	
Running Surface	1575×600 (mm)	
Treadmill Belt	3.2T	2.2T

U02

Commercial Treadmill



Smart Application

18.5touch screen | Bluetooth | WI-FI | Social Interconnect | Real-timedata | Immersive running

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2200*910*1580 (MM)
Running surface	1530×580 (MM)

U05

Commercial Treadmill

IMPORTS

LED

TFT

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2200×910×1650（MM）

Smart Application

18.5Color touch screen

Bluetooth

WI-FI

social interconnect

Real-timedata

Immersive running

MS80

Commercial Treadmill

CA IMPORTS

Smart Application

15.6touch screen | Bluetooth | WI-FI | Social Interconnect | Real-timedata | Immersive running

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2370×950×1580（MM）
Running surface	1650×560MM

MT05-T
TREADMILL

Mirror Screen(Portrait and Landscape Rotated)

MT05-T

Mirror Screen
(Portrait and Landscape Rotated)

Smart Application

- 21.5-inch Rotating Screen Mirroring
- Bluetooth
- WI-FI
- Mobile screen projection
- Real-Time data

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	Landscape screen 2062×1014×1643（MM） Portrait screen 2062×1014×1741（MM）
Running surface	580×1540 (MM)

MT200A
TREADMILL

MT200A TREADMILL

Smart Application

21.5 touch screen | Bluetooth | WI-FI | social interconnect | Real-timedata | Immersive running

Functional Parameter

Rated power of motor	2.5HP（1.8KW）
Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2062×997×1720（MM）
Running surface	580×1540 （MM）

MT200C
TREADMILL

IMPORTS

MT200C TREADMILL

Smart Application

21.5 touch screen | Bluetooth | WI-FI | social interconnect | Real-timedata | Immersive running

Functional Parameter

Rated power of motor	2.5HP（1.8KW）
Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2062×997×1720（MM）
Running surface	580×1540 （MM）

MT300A

TREADMILL

MT300A TREADMILL

Smart Application

23.6 touch screen | Bluetooth | WI-FI | social interconnect | Real-timedata | Immersive running

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2062×1014×1650（MM）
Running surface	580×1540 (MM)

MT300C

TREADMILL

IMPORTS

MT300C TREADMILL

Smart Application

23.6touch screen | Bluetooth | WI-FI | social interconnect | Real-timedata | Immersive running

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2062×1014×1650（MM）
Running surface	580×1540（MM）

MT500C-T

TREADMILL

Mirror Screen(Portrait and Landscape Rotated)

MT500C-T

Mirror Screen
(Portrait and Landscape Rotated)

Smart Application

- 21.5-inch Rotating Screen Mirroring
- Bluetooth
- WI-FI
- Mobile phoneprojection
- Real-timedata

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	Landscape screen 2062×1014×1757（MM） Portrait screen 2062×1014×1860（MM）
Running surface	580×1540 （MM）

PN7000

Commercial Treadmill

15.6-inch LED display

PN7000

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2250×990×1680（MM）
Running surface	1600×530MM

S600

Commercial Treadmill

IMPORTS

Smart Application

21.5 touch screen | Bluetooth | WI-FI | Social Interconnect | Real-timedata | Immersive running

Functional Parameter

Speed range	1-20KM/H
Incline range	0-20%
Unit Dimensions	2080×950×1750（MM）
Running surface	1530×600MM

SC02
Stair machine

Rotating cast screen

Built-in heart rate sensor chip never slips

Time, Distance, Calories, Heart rate, Speed, Incline

Portrait screen

SC02 Stair machine

Display screen	11.6" screen/21.5" Rotating cast screen
Motor	ECB DC motor
11.6" screen Size	1550mm*830mm*2180mm
21.5" Rotating cast screen Size	Landscape screen 1550mm*830mm*2270mm Portrait screen 1550mm*830mm*2370mm
Max user weight	200KG
Resistance system	Electro magnetic resistance
Step Width	555mm
Step Height	204mm
Step depth	250mm

M-5811

Indoor Bike

Functional Parameter

Unit Dimensions	1480 x 690 x 1255（MM）
Packing dimensions	1410×440×980（MM）
Unit /weight	86/96kg

M-5811

M-5818

Indoor Bike

Functional Parameter

Unit Dimensions	1270×705×1290 (mm)
Packing dimensions	1350×480×1030 (mm)
Unit weight	76/85kg

M-5810

Indoor Bike

Indoor Bike

IMPORTS

Functional Parameter

Unit Dimensions	1225×630×1170（MM）
Packing dimensions	1150×430×970（MM）
Unit weight	69/75.5kg

M-5807

Indoor Bike

Functional Parameter

Unit Dimensions	1200×620×1240（MM）
Packing dimensions	1160×350×1020（MM）
Unit weight	57.5/63kg

M-5809

Indoor Bike

Functional Parameter

Unit Dimensions	1158×620×1126（MM）
Unit weight	60.5/66.5kg

IMPORTS

M-8809EL

Elliptical

Functional Parameter

Packing dimensions	2250×810×940（MM）
Unit Dimensions	2210×730×1635（MM）
Unit weight	130KG

M-8808EL

Elliptical

Elliptical

Functional Parameter

Unit Dimensions	2100×723×1755（MM）
Packing dimensions	2180×810×990（MM）
Unit weight	225KG

M-8810

Functional Walker

IMPORTS

Functional Parameter

Unit Dimensions	1505×920×1595（MM）
Packing dimensions	1660×990×1580（MM）
Unit weight	188/259KG

M-7808U

Upright Bike

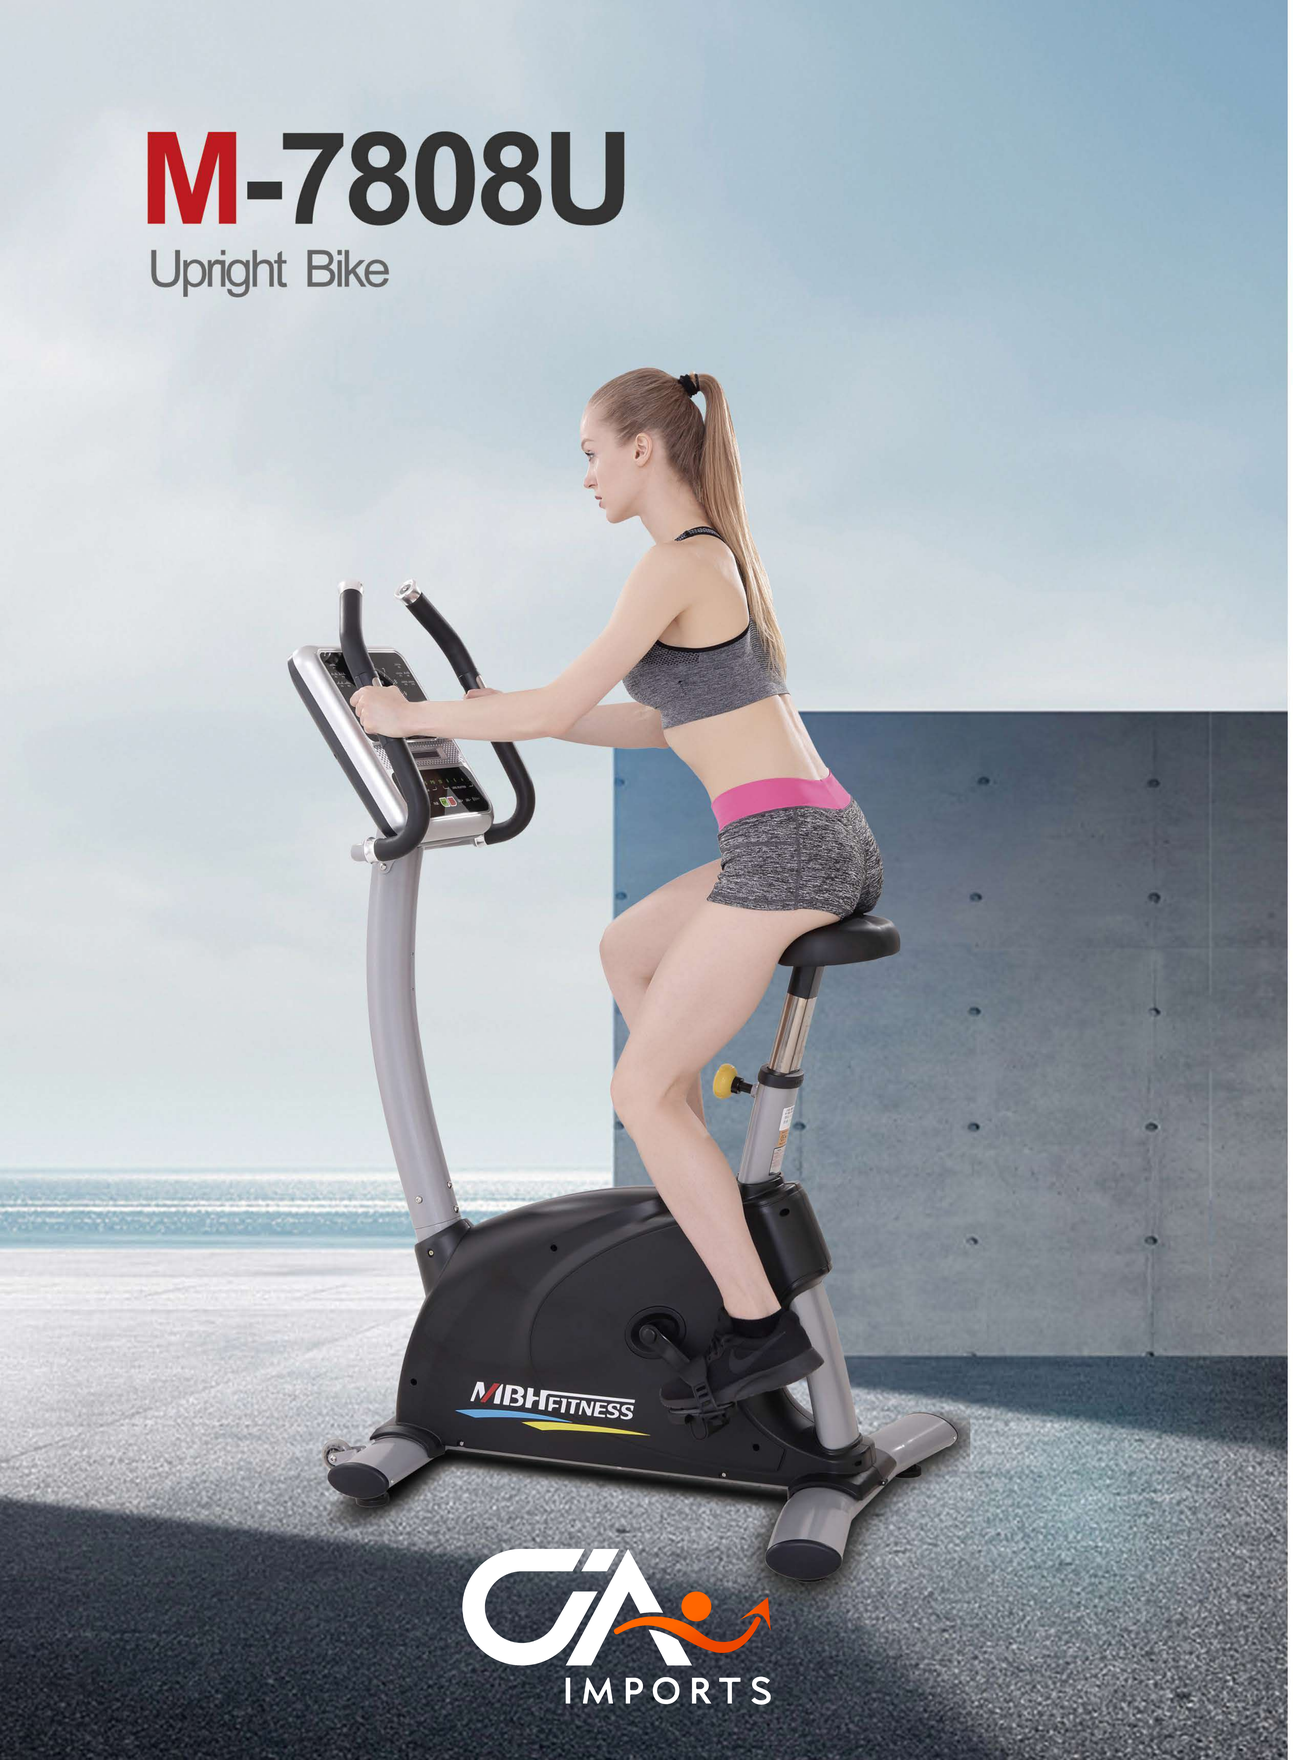

M-7808U

Functional Parameter

Packing dimensions	1110×430×930（mm）
Unit Dimensions	1215×730×1575（mm）
Unit weight	63kg

M-7808R

Upright Bike

Functional Parameter

Packing dimensions	1710×690×930（MM）
Unit Dimensions	1765×730×1470（MM）
Unit weight	86kg